




THINNER TDS

Europe

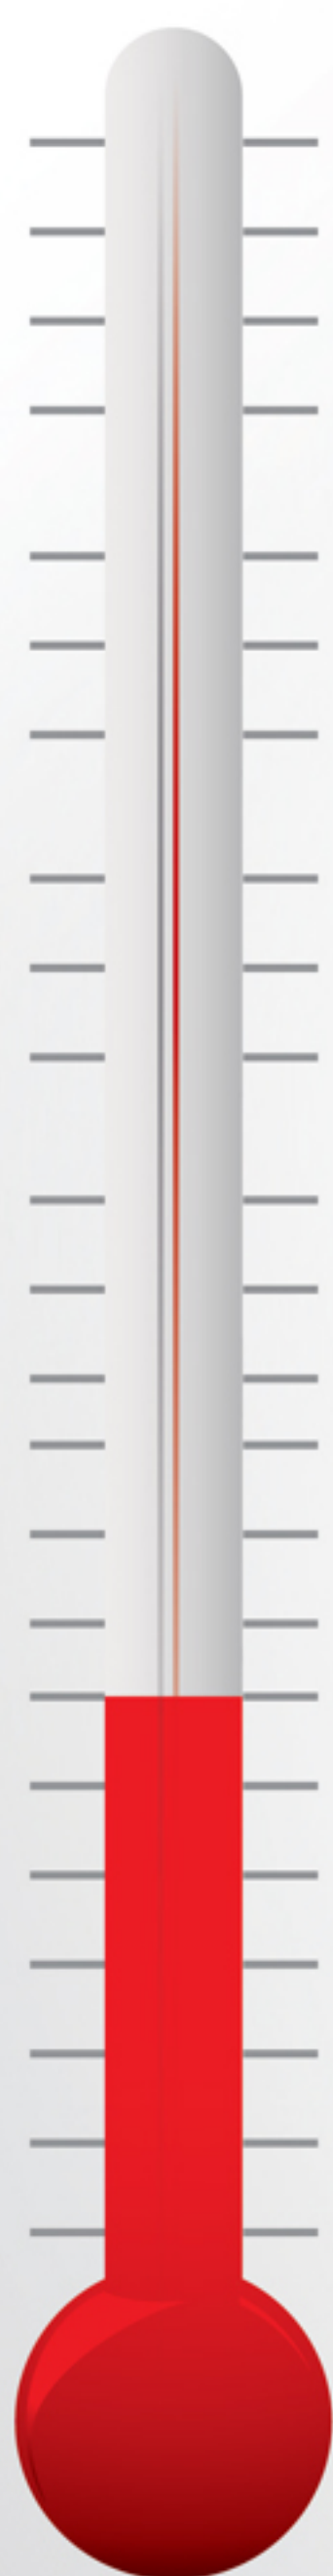

30°

25°

20°

15°

PARTS



OPAQUE COLORS

S711
S721

S721

S711

S711

S719

S711

BICOAT

S711
S721

S711
S721

S719
S721

S711

S719

S711

CLEAR TOP COAT

S721

S721

S721

S711

S719

S711

S719 / S2050 THINNERS

HIGH PERFORMERS OF THE GENROCK LINE

ONE OF THE MAIN CHARACTERISTICS OF THE 4 THINNERS: POSSIBILITY OF COVERING LARGE AREAS IN ALL CLIMATE CONDITIONS.

- USE S2050 IN TEMPERATURE EXCEEDING 30 °C
- USE FAST THINNER S719 IN TEMPERATURE BELOW 15°C
- IN EXTREME COLD & WET WEATHER CONDITIONS, ACCELERATE FAST THINNER S719 WITH UP TO 10% OF ACCELERATOR 8620 FOR FASTER DRYING. (USE ACCELERATED THINNER FOR 2K TOPCOATING MATERIAL ONLY)